


Cerberus

LED BACKLIT USB Gaming Keyboard

User Manual

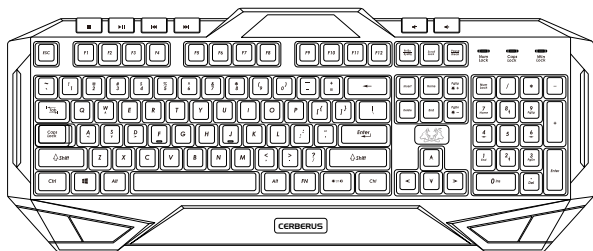

Package contents

- 1 x ASUS Cerberus Gaming Keyboard
- 1 x Quick Start Guide


System requirements

- Computer with an available USB 2.0 port
- Microsoft Windows® 10 / 8.x / 7 / XP

Specifications summary

Connector	Single USB
Anti-Ghosting	19KRO (Key Rollover)
Switch type	Membrane with rubber dome
Switch life cycle	8 million keystrokes
Backlit	2 colors (red/blue) 4 level light settings (high, middle, low, off)
Cable type/ cable length	2m braided cable
Key cap material	ABS
Media keys	Media keys for volume control, play/pause, previous track, and next track
Macro keys	12 Macro keys (F1~F12) with macro enable/disable mode
Special feature 1	Windows key lock
Dimension	471 x 186 x 41 mm (LxWxH)
Weight	1100 g
Operating system	Microsoft® Windows® 10/8.1/7/XP

Getting to know your Gaming Keyboard

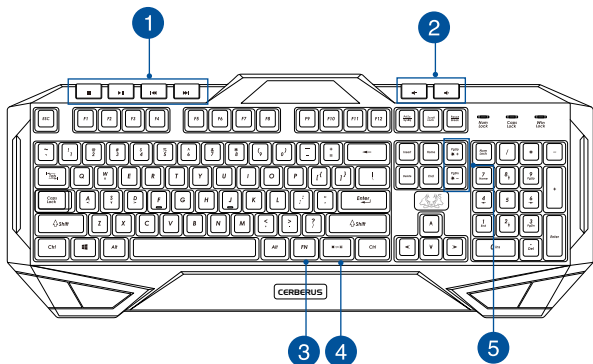

-
- | | | | |
|----------|--|----------|---|
| 1 | Media player control (Turn on, stop/pause, previous, next) | 4 | Backlight control on/off |
| 2 | Volume down / volume up | 5 | [Fn] + PgUp/PgDn: Increase or decrease backlight brightness |
| 3 | [Fn] key | | |
-

Installing your gaming keyboard

Connect the USB connector of your gaming keyboard to the USB port of your computer. Your computer automatically detects and installs the keyboard driver. When the installation is completed, you can start using your gaming keyboard.

19 Key anti-ghosting

Q	Space
A	↑
Z	↓
W	←
S	→
X	Tab
E	Alt (Left)
D	Ctrl (Left)
C	Shift (Left)
B	

Hot keys

	Stop
	Play/Pause
	Previous
	Next
	Volume down
	Volume up

Multimedia keys

Combine the [Fn] key and some keys to quickly access your mails, files, and other functions on your computer.


[Fn] + [F1]	Launch Media Player
[Fn] + [F2]	Volume down
[Fn] + [F3]	Volume up
[Fn] + [F4]	Mute
[Fn] + [F5]	Stop
[Fn] + [F6]	Previous
[Fn] + [F7]	Play/Pause
[Fn] + [F8]	Next
[Fn] + [F9]	Launch Mail
[Fn] + [F10]	Launch the web browser
[Fn] + [F11]	Lock the keyboard
[Fn] + [F12]	Launch the calculator
[Fn] + [Q]	Launch the Rapid fire mode (repeating keystrokes)
[Fn] + [Tab]	Transfer W / A / S / D keys to arrow keys
[Fn] + [Win]	Disable the Windows key

NOTE: Once you disconnect the gaming keyboard from the USB port of your computer, [Fn] + [F11], [Fn] + [Q], [Fn] + [Tab], and [Fn] + [Win] function keys will be reset to factory defaults.

Using the Swap mode

The Swap mode lets you exchange the functions of some keys, except for these keys: F1~F12, Q, Tab, Win, ESC, Caps Lock, Insert, Home, and media keys.




To use the Swap mode:

1. Press [FN] + [Home] and wait for the Win Lock key  to light up and turn red, indicating that the Swap mode is enabled.
2. Press a key (for example, key A), and the Win Lock LED flashes red.
3. Press another key (for example, key S) and the Win Lock LED turns to solid red, indicating that the functions of the keys are swapped. Repeat steps 2 and 3 to swap the functions of other keys.
4. To disable the Swap mode, press [Fn] + [ESC].

Macro mode

Configure the function keys (F1~F12) as macro keys to conveniently launch often-used apps or key combinations, and perform repetitive tasks or actions with a single keystroke.

To configure as macro key:

1. Press [FN] + [Insert] and wait for the Win Lock key  to light up and turn red, indicating that the macro mode is enabled.
2. Press a function key (F1~F12) and wait for the Win Lock key  to flash red.
3. Press the keys that you want to assign for the macro key.
4. When done, press [FN] + [ESC] to exit the recording mode.
5. To configure more macro keys, ensure that the Win Lock key  is still solid red, then repeat steps 2 to 4.
6. To exit the macro mode, long press [FN] + [ESC]. Wait for the keyboard backlight to flash twice and the Win Lock key LED to turn off.

Mode Switch

PROFILE	DESCRIPTION
Profile 0	Normal keyboard with blue backlight No Macro and Swap functions
Profile 1	Gaming keyboard with red backlight Complete Macro and Swap functions

NOTES:

- To switch profiles, press [FN] + [Caps Lock]. The backlight flashes twice to indicate the profile mode switch.
- In Profile 0 mode, the function keys F1~F12 work as standard keys. To set the function keys as macro keys, switch to Profile 1.

Breath light

The Breath Light function allows you to set the keyboard backlight in a looping bright to dim mode. There are four breath light levels: **High**, **Middle**, **Low**, and **No Light**.

To use the Breath light function:

- Press [Fn] +  to enable/disable the Breath Light function.

PROFILE	BACKLIGHT LED
Profile 0	Blue
Profile 1	Red

- Press [Fn] + [-] to decrease the speed of the Breath Light function.
- Press [Fn] + [+] to increase the speed of the Breath Light function.

Reset

NOTE: The Reset function restores the system to the default settings.

To reset to the default settings:

- Press and hold [Fn] + [Delete] for about three (seconds) until the Num Lock, Caps Lock, and Win Lock LEDs flash thrice, then flash once to indicate that the reset process is completed.